



iselGermany
engineering to the point.

Aluminum profiles and accessories

Strong profiles for many applications

Automation sales team



Steffan Gärth

Technical sales

Tel.: +49 (0) 6659 / 981-773
Fax: +49 (0) 6659 / 981-776
steffan.gaerth@isel.com



Katja Henkel

Technical sales

Tel.: +49 (0) 6659 / 981-744
Fax: +49 (0) 6659 / 981-776
katja.henkel@isel.com



Jessica Gatterdam

Team Assistant Sales


Tel.: +49 (0) 6659 / 981-751
Fax: +49 (0) 6659 / 981-776
jessica.gatterdam@isel.com

General Terms of Delivery and
terms of payment



www.isel.com/agb-aeb

Stand: Juli 2025

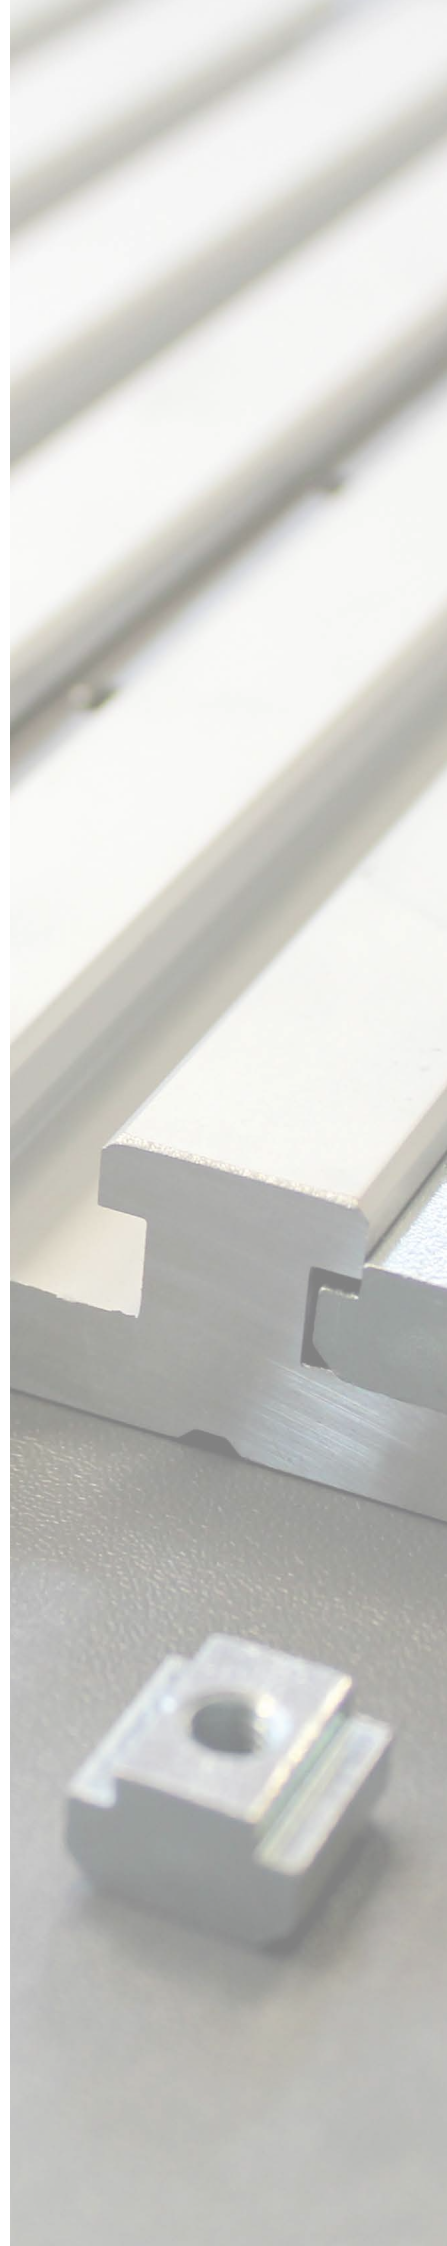



Whether for the construction of machine frames,
as connecting elements or universal clamping surfaces:

You always make the right choice with our aluminum profiles!

Aluminum profiles

Proven in-house developments for a wide range of applications

Our aluminum profiles have been specially developed for use in industry and mechanical engineering. They are characterized by their flexible compact construction and outstanding stability, which makes the assembly of systems much easier and faster accelerated.

Our aluminum profiles are manufactured according to our own design, which guarantees flexibility. They comply with the standard DIN EN 12020-2 and are available as natural anodized extruded profiles in standard lengths of 1 and 3 meters. We will be happy to produce individual lengths and processing according to your drawing for your project.

A wide variety of aluminum profiles cover the most diverse requirements, so you are sure to find the right solution for your construction at isel.


Our aluminium profiles are characterized by a very good price-performance ratio and low weight combined with high strength. A comprehensive range of accessories rounds off our aluminum profile program.

CAD data can be found on our website **www.isel.com**

Overview Aluminium profiles


T-slot plates PT 25 / PT 50

8-9

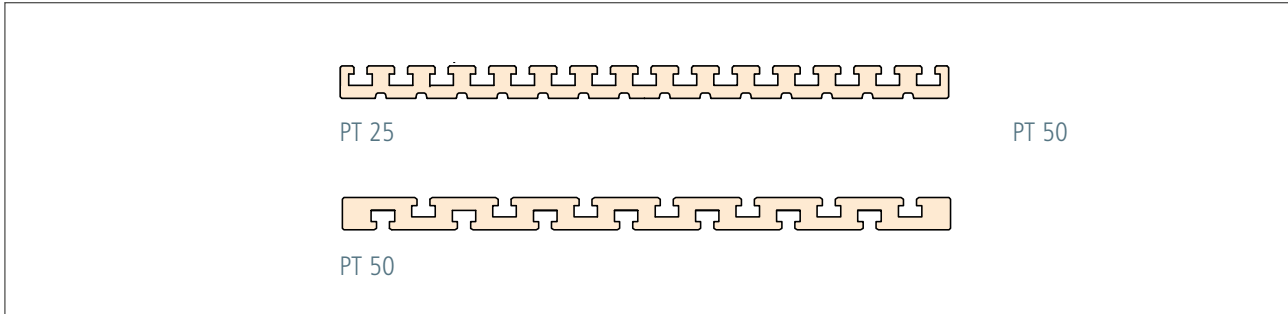


Connection profiles PL 40 / PL 80

10

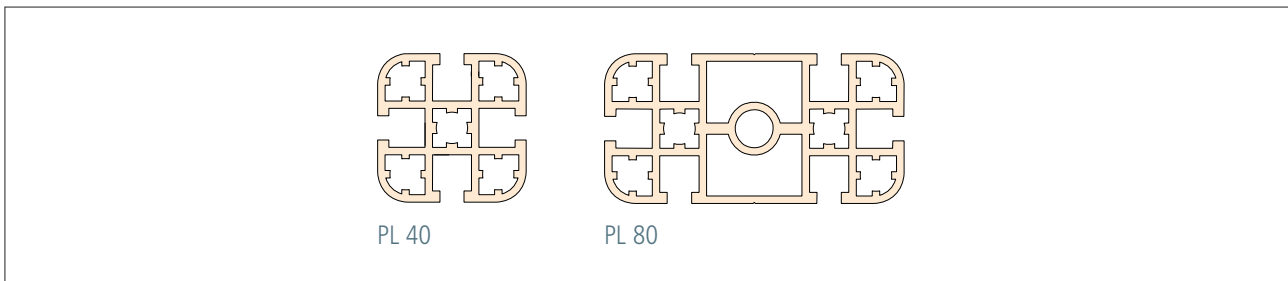


Universal profiles PU 25 / PU 50

11

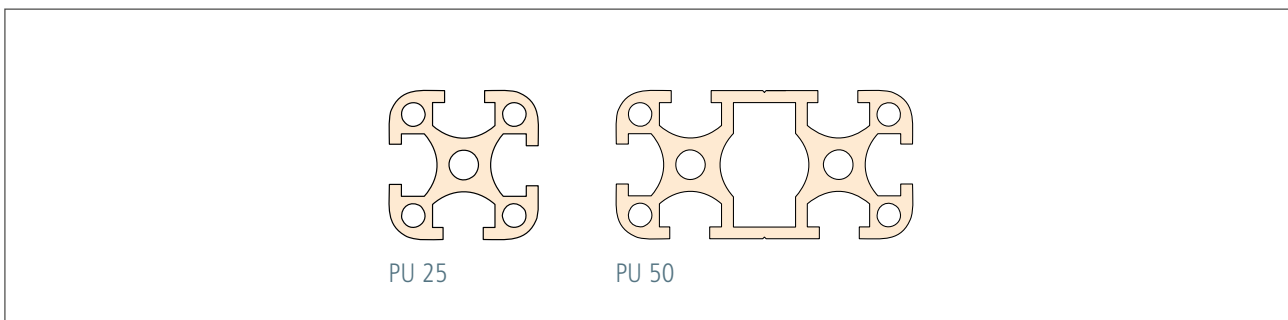


Rectangular profiles type RE 40 / RE 65

12-13

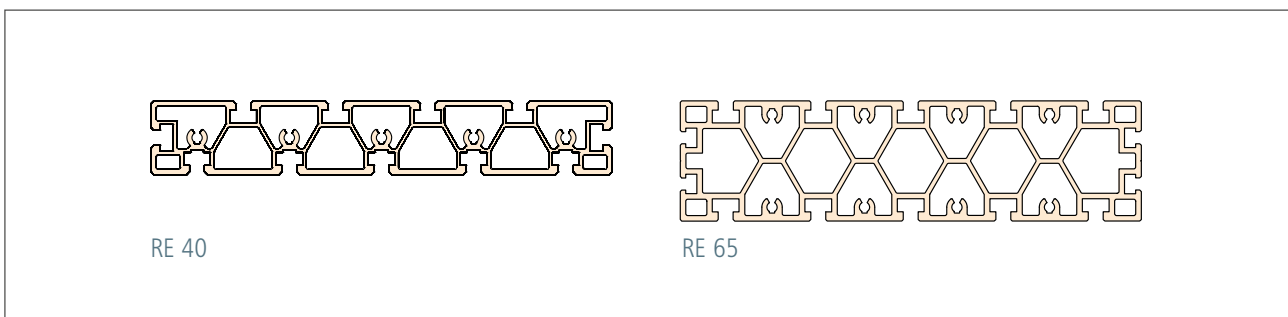


Stand profiles PS 50 / 80 / 100 / 140

14-15

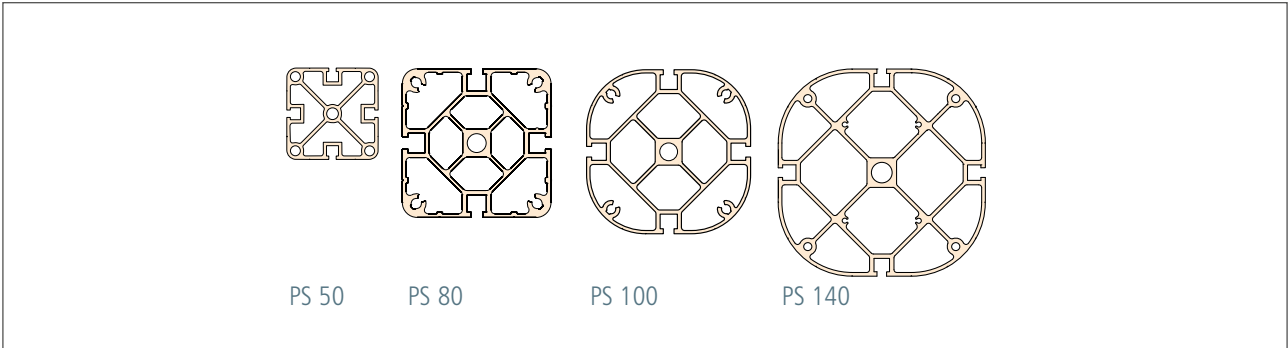

Panel profiles PP 50 - PP 250

16

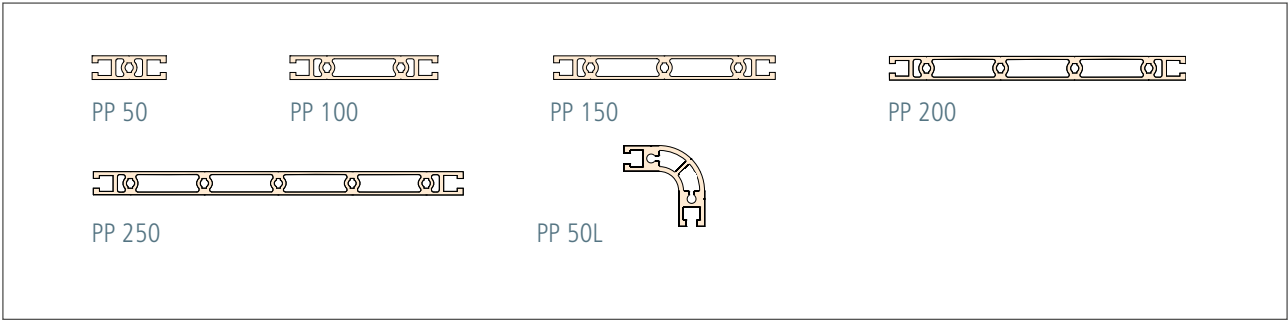

Working tables AT 1 / AT 2 / AT 3

18

Assembly table MT2

20

Configurable machine base frames

22

Accessories

24



Modular flexibility and highest level of stability

From aluminum square profiles which can be used universally to groove plates flatly milled on both sides and a selection of connection solutions: The modular profile components are coordinated with one another so to offer you a wide range of combination options when it comes to the design of your working environment. By means of the aluminum profiles, complete mounting systems equipped with all needed applications can be designed - according to your requirements.



Light, compact and stable: With a selection of robust aluminum square and round profiles, clamping connections and the range of accessories, the profiles open up every conceivable freedom in the design of ergonomic, efficient and safe working environments. Thick-walled, distortion-free and dimensionally stable: Combine stabilizing rectangular profiles and grooved plates to reach a universal precision, clamping and machining surfaces that can be used in all machines and can be used for conversions and extensions as well if needed.








T-slot plates PT 25

- Universal precision, clamping and machining surface
- Aluminum, naturally anodized
- T-slot grid 25 mm
- Manufactured according to the standard DIN EN 12020-2
- Milled on both sides
- Can be used on all machines
- Thick-walled, distortion-free and extremely dimensionally stable
- Profile cutting upon request
- Option:
 - Drain channel for small amounts of liquid



Accessories: see page 26

Dimensional drawings

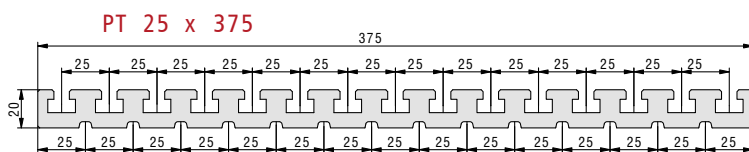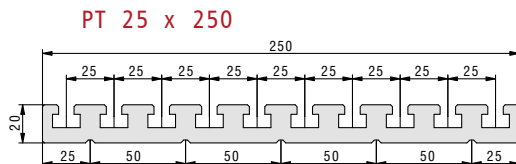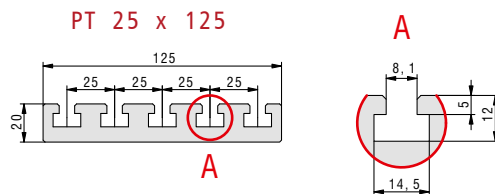

Technical data

PT 25

Dimensions (W x H)	125 x 20 mm	250 x 20 mm	375 x 20 mm
Length	up to 3 meters (special lengths upon request)		
Weight	≈ 4.8 kg/m	≈ 9.6 kg/m	≈ 13.7 kg/m
Features	T-slot indentations on one side in a grid of 25 mm		
Moment of inertia I_x	243.36 cm ⁴	1848.50 cm ⁴	5996.01 cm ⁴
Moment of inertia I_y	6.46 cm ⁴	12.77 cm ⁴	17.90 cm ⁴
Resistance moment W_x	38.94 cm ³	147.88 cm ³	319.79 cm ³
Resistance moment W_y	6.46 cm ³	12.77 cm ³	17.90 cm ³

Order key PT 25

W 125 x H 20 mm:

201014 ~~XXXX~~
 e.g. 0400 = L 400
 3000 = L 3000*

Length in mm (in a grid of 100mm)

W 250 x H 20 mm:

201018 ~~XXXX~~
 e.g. 0400 = L 400
 3000 = L 3000*

Length in mm (in a grid of 100mm)

W 375 x H 20 mm:


201020 ~~XXXX~~
 e.g. 0400 = L 400
 3000 = L 3000*

Length in mm (in a grid of 100mm)

*Raw profile length L = 3050...3100 mm




T-slot plates PT 50

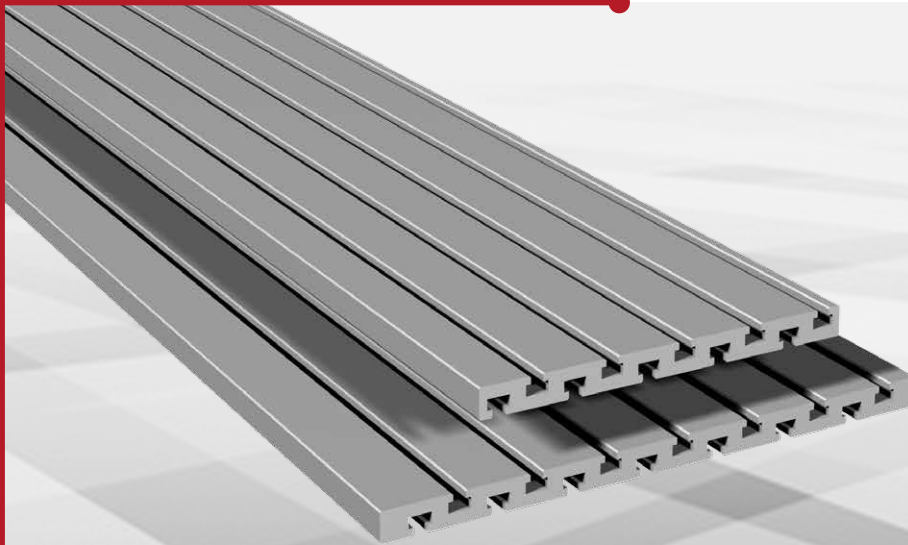

- Universal precision, clamping and machining surface
- Aluminum, naturally anodized
- T-slot grid 50 mm
- Manufactured according to the standard DIN EN 12020-2
- Milled on both sides
- Can be used on all machines
- Thick-walled, distortion-free and extremely dimensionally stable
- Profile cutting upon request

Accessories: see page 26

Dimensional drawings

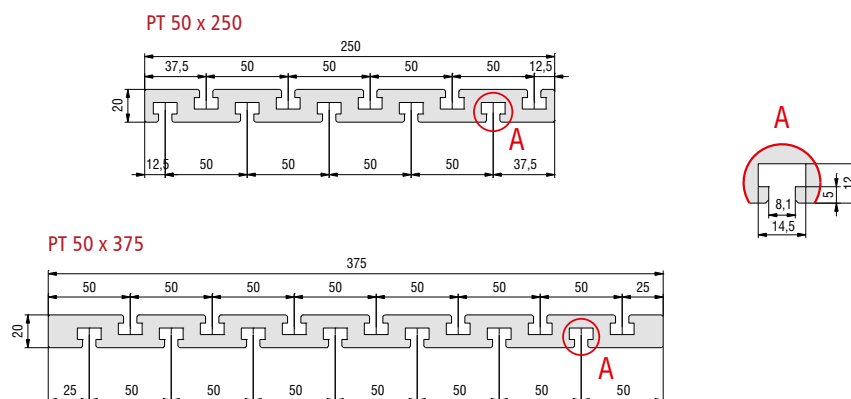

Technical data

PT 50

Dimensions (W x H)	250 x 20 mm	375 x 20 mm
Length	up to 3 meters (special lengths upon request)	
Weight	≈ 10.0 kg/m	≈ 14.8 kg/m
Features	T-slot indentations on both sides in a 50 mm grid	
Moment of inertia I_x	2062.99 cm ⁴	6745.96 cm ⁴
Moment of inertia I_y	13.85 cm ⁴	20.63 cm ⁴
Resistance moment W_x	165.04 cm ³	359.78 cm ³
Resistance moment W_y	13.85 cm ³	20.63 cm ³

Order key PT 50

W 250 x H 20 mm:

201016 ~~XXXX~~

e.g. 0400 = L 400

3000 = L 3000*

Length in mm (in a grid of 100mm)

W 375 x H 20 mm:

201019 ~~XXXX~~

e.g. 0400 = L 400

3000 = L 3000*

Length in mm (in a grid of 100mm)

*Raw profile length L=3050...3100 mm



Lightweight frame profiles PL 40 / PL 80


- for rapid and easy assembly of frames, tables as well as racks
- Aluminum, naturally anodized
- Manufactured according to the standard DIN EN 12020-2
- light, compact, and stable
- suitable for higher loads
- With our clamping connections, very strong connections between the profiles which are resistant to tension, torsion as well as bending are produced by using profile bores and clamping elements
- Profile cutting upon request

Option: powder coatings

Accessories: see page 26



Dimensional drawings

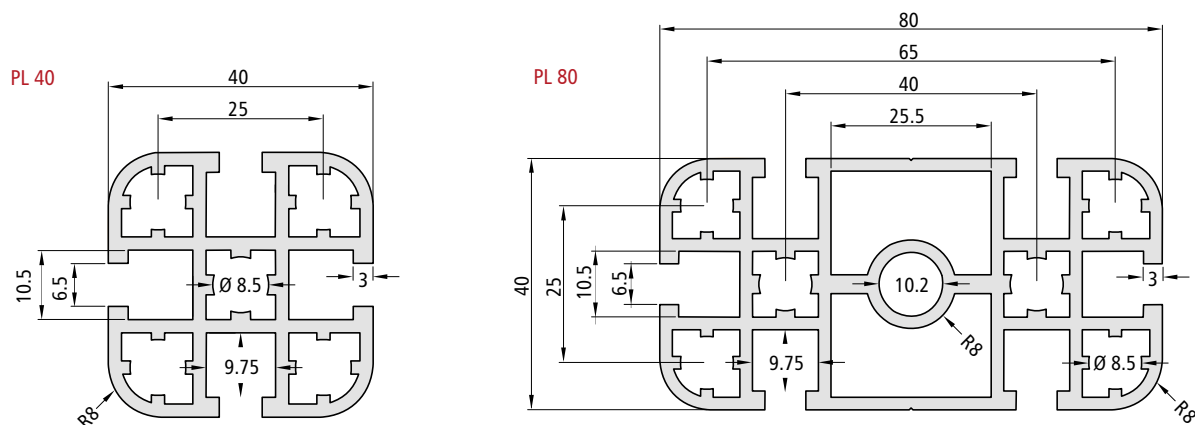

Technical data	PL 40	PL 80	Order data	L 1000 mm	L 3000*
Dimensions (W x H)	40 x 40 mm	80 x 40 mm	PL 40		
Length	up to 3 meters (special lengths upon request)		W 40 x H 40 mm	200008 1000	200008 3000
Weight	≈ 1.5 kg/m	≈ 2.9 kg/m	PL 80		
Features	4 T-slot inserts for sliding nuts M6 5 hollow feeds, Ø 8.5 mm for M10	6 T-slot inserts for sliding nuts M6 6 hollow feeds, Ø 8.5 mm for M10, Ø 10.2 mm for M12	W 80 x H 40 mm	200009 1000	200009 3000
Moment of inertia I_x	8.38 cm ⁴	64.40 cm ⁴	*Raw profile length L=3050...3100 mm		
Moment of inertia I_y	8.38 cm ⁴	16.36 cm ⁴			
Resistance moment W_x	4.19 cm ³	16.10 cm ³			
Resistance moment W_y	4.19 cm ³	8.18 cm ³			




Universal profiles PU 25 / PU 50



- for rapid and easy assembly of frames, tables as well as racks
- Aluminum, naturally anodized
- Manufactured according to the standard DIN EN 12020-2
- light, compact, and stable
- universally applicable
- suitable for higher loads
- With our clamping connections, very strong connections between the profiles which are resistant to tension, torsion as well as bending are produced by using profile bores and clamping elements
- Profile cutting upon request

Accessories: see page 26

Dimensional drawings

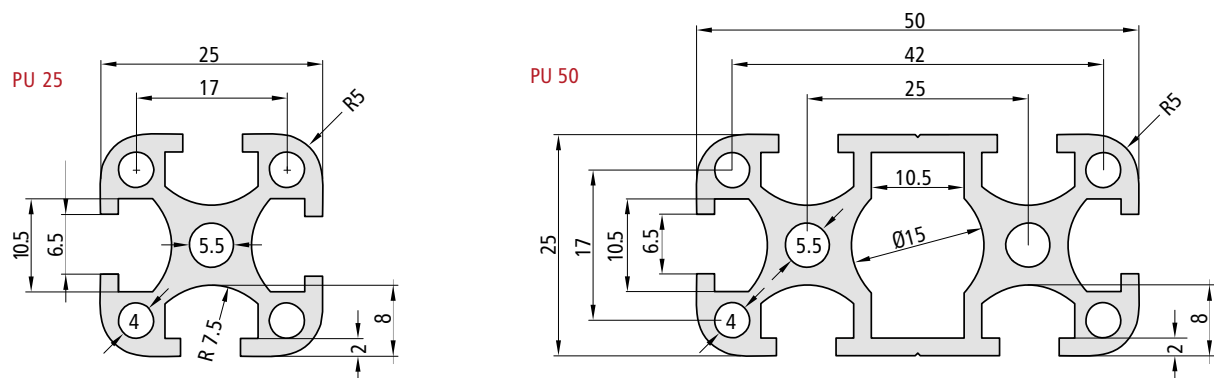

Technical data	PU 25	PU 50
Dimensions (W x H)	25 x 25 mm	50 x 25 mm
Length	up to 3 meters (special lengths upon request)	
Weight	≈ 0.7 kg/m	≈ 1.3 kg/m
Features	4 T-slot inserts for sliding nuts M6 1 hollow feeds, Ø 5.5 mm for M6	6 T-slot inserts for sliding nuts M6 2 hollow feeds, Ø 5.5 mm for M6
Moment of inertia I_x	1.43 cm ⁴	10.99 cm ⁴
Moment of inertia I_y	1.43 cm ⁴	2.81 cm ⁴
Resistance moment W_x	1.14 cm ³	4.40 cm ³
Resistance moment W_y	1.14 cm ³	2.25 cm ³

Order data	PU 25	PU 50
Part No. for L=1000mm	200001 1000	200002 1000
Part No. for L=3000mm (Raw profile length L=3050...3,100 mm)	200001 3000	200002 3000




Rectangular profiles type RE 40

- Universal precision, clamping and machining surface
- as a stabilizer in machine and subframe constructions
- Aluminum, naturally anodized
- Manufactured according to the standard DIN EN 12020-2
- light, very stable
- Numerous applications are possible, if combined with the accessories
- Profile cutting upon request

Accessories: see page 26



Dimensional drawings

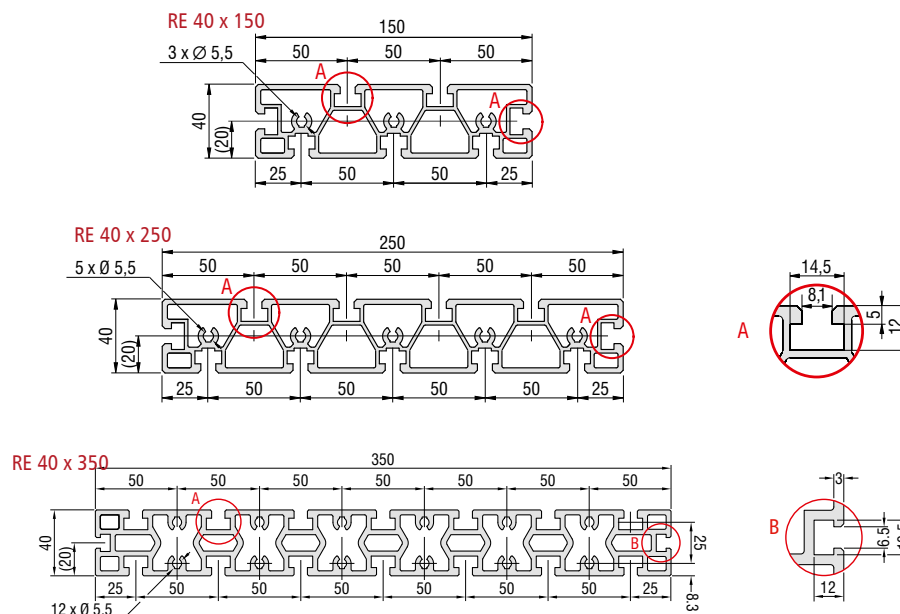

Technical data

RE 40

Dimensions (W x H)	150 x 40 mm	250 x 40 mm	350 x 40 mm
Length	up to 3 meters (special lengths upon request)		
Weight	≈ 4.8 kg/m	≈ 7.6 kg/m	≈ 13.38 kg/m
Features	Several hollow chambers and T-slot indentations for sliding nuts or threaded strips M6 as well as front indentations for M6 screws		
Moment of inertia I_x	393.70 cm ⁴	1654.53 cm ⁴	5.626.00 cm ⁴
Moment of inertia I_y	33.42 cm ⁴	54.18 cm ⁴	97.45 cm ⁴
Resistance moment W_x	52.49 cm ³	131.64 cm ³	321.48 cm ³
Resistance moment W_y	16.71 cm ³	27.09 cm ³	48.50 cm ³

Order data

L 1000 mm

L 3000*

RE 40 W 150 x H 40mm	201035 1000	201035 3000
RE 40 W 250 x H 40 mm	201030 1000	201030 9000
RE 40 W 350 x H 40 mm	201031 1000	201031 3000

*Raw profile length L=3050...3,100 mm




Rectangular profiles type RE 65



- Universal precision, clamping and machining surface
- as a stabilizer in machine and subframe constructions
- Aluminum, naturally anodized
- Manufactured according to the standard DIN EN 12020-2
- light, very stable
- Milled on both sides
- Numerous applications are possible, if combined with the accessories
- Profile cutting upon request

Accessories: see page 26

Dimensional drawings

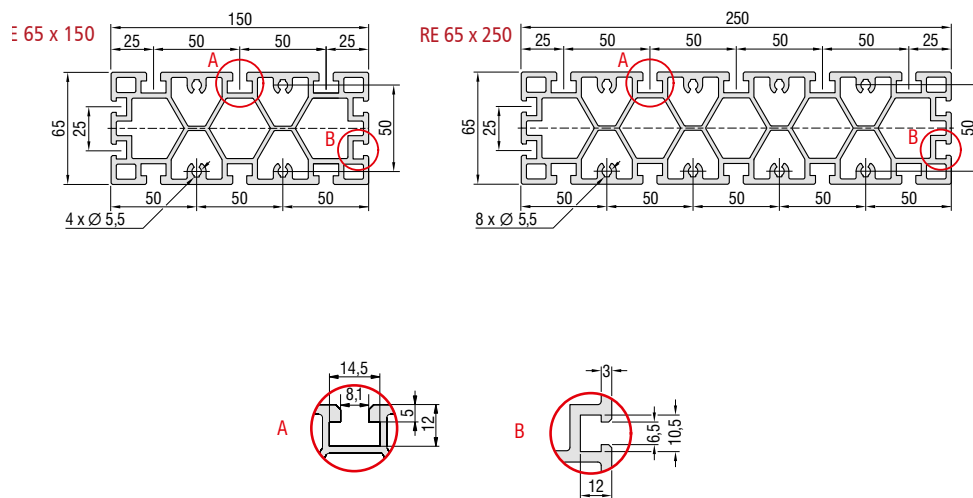

Technical data

RE 65

Dimensions (W x H)	150 x 65 mm	250 x 65 mm
Length	up to 3 meters (special lengths upon request)	
Weight	≈ 7.7 kg/m	≈ 12.4 kg/m
Features	Several hollow chambers and T-slot indentations for sliding nuts or threaded strips M6 as well as front indentations for M6 screws	
Moment of inertia I_x	633.47 cm ⁴	2,658.48 cm ⁴
Moment of inertia I_y	148.87 cm ⁴	243.85 cm ⁴
Resistance moment W_x	84.46 cm ³	212.68 cm ³
Resistance moment W_y	45.83 cm ³	75.03 cm ³

Order data

L 1000 mm

L 3000*

RE 65 W 150 x H 65 mm	201034 1000	201034 3000
RE 65 W 250 x H 65 mm	201032 1000	201032 3000

*Raw profile length L=3050...3100 mm




Stand profiles PS 100 / HP 140


- for rapid and easy assembly of frames, tables as well as racks
- Aluminum, naturally anodized
- Manufactured according to the standard DIN EN 12020-2
- light, compact, and stable
- suitable for higher loads
- With our clamping connections, very strong connections between the profiles which are resistant to tension, torsion as well as bending are produced by using profile bores and clamping elements
- Profile cutting upon request

Option: powder coatings

Accessories: see page 26

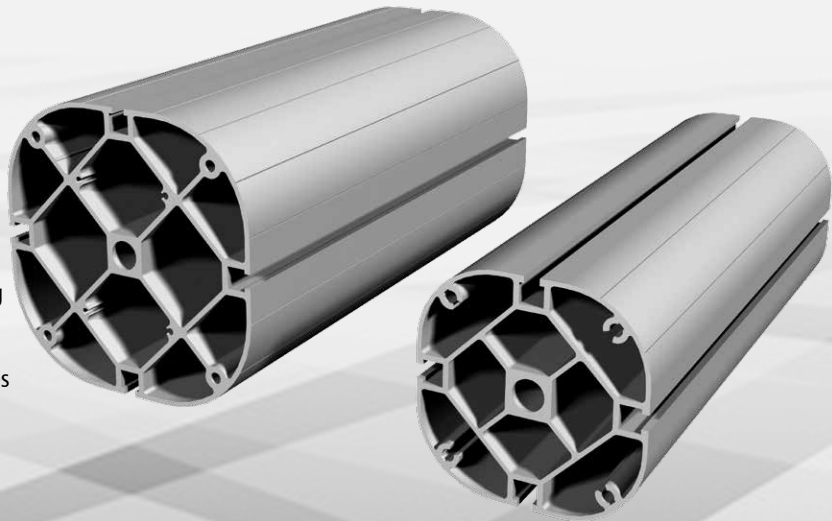

Dimensional drawings

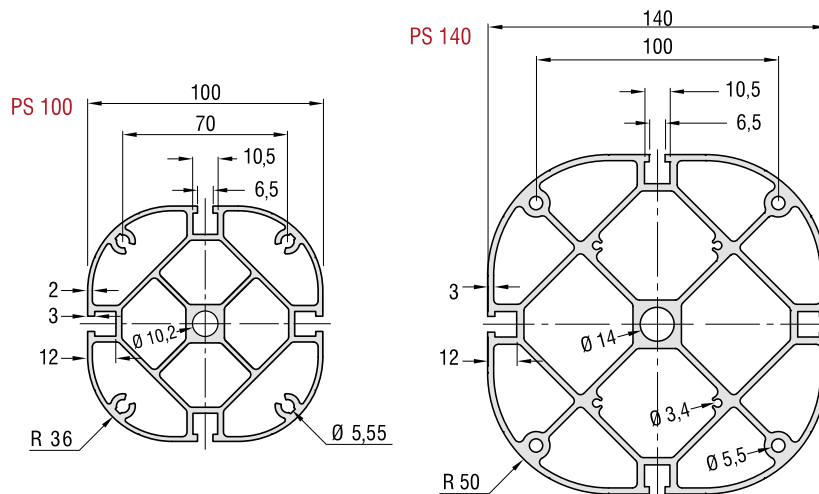

Technical data	HP 100	HP 140	Order data	L 1,000 mm	L 3,000*
Dimensions (W x H)	100 x 100 mm	140 x 140 mm	HP 100		
Length	up to 3 meters (special lengths upon request)		W 100 x H 100 mm	200015 1000	200015 3000
Weight	≈ 5.1 kg/m	≈ 9.2 kg/m	HP 140		
Features	4 T-slot inserts for sliding nuts M6 4 hollow feeds, Ø 5.55 mm for M6 Hollow feeds, Ø 10.2 mm for M12	4 T-slot inserts for sliding nuts M6 4 hollow feeds, Ø 5.5 mm for M6 4 hollow feeds, Ø 3.4 mm for M4 Hollow feeds, Ø 10.2 mm for M12	W 140 x H 140 mm	200016 1000	200016 3000
Moment of inertia I_x	163.00 cm ⁴	601.80 cm ⁴	*Raw profile length L=3050...3,100 mm		
Moment of inertia I_y	163.00 cm ⁴	598.11 cm ⁴			
Resistance moment W_x	32.60 cm ³	85.97 cm ³			
Resistance moment W_y	32.60 cm ³	85.44 cm ³			



Stand profiles PS 50 / PS 80




- for rapid and easy assembly of frames, tables as well as racks
- Aluminum, naturally anodized
- Manufactured according to the standard DIN EN 12020-2
- light, compact, and stable
- suitable for higher loads
- With our clamping connections, very strong connections between the profiles which are resistant to tension, torsion as well as bending are produced by using profile bores and clamping elements
- Profile cutting upon request

Option: powder coatings

Accessories: see page 26

Dimensional drawings

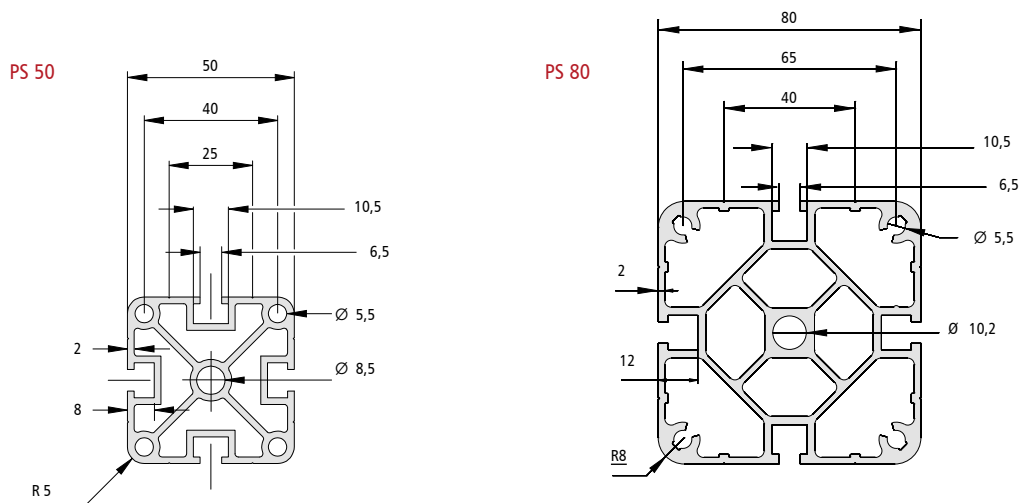

Technical data	HP 50	HP 80	Order data	L 1000 mm	L 3000*
Dimensions (W x H)	50 x 50 mm	80 x 80 mm	HP 50		
Length	up to 3 meters (special lengths upon request)		W 50 x H 50 mm	200003 1000	200003 3000
Weight	≈ 2.3 kg/m	≈ 4.5 kg/m	HP 80		
Features	4 T-slot inserts for sliding nuts M6 4 hollow feeds, Ø 5.5 mm for M6, Ø 8.5 mm for M10	4 T-slot inserts for sliding nuts M6 4 hollow inserts, Ø 5.5 mm for M6, Ø 10.2 mm for M12	W 80 x H 80 mm	200014 1000	200014 3000
Moment of inertia I_x	22.06 cm ⁴	111.80 cm ⁴	*Raw profile length L=3050...3100 mm		
Moment of inertia I_y	22.06 cm ⁴	111.80 cm ⁴			
Resistance moment W_x	8.82 cm ³	27.95 cm ³			
Resistance moment W_y	8.82 cm ³	27.95 cm ³			




Panel profiles PP 50 - PP 250

- for rapid and easy assembly of frames, tables as well as racks
- Aluminum, naturally anodized
- Manufactured according to the standard DIN EN 12020-2
- light and very strong
- upright, particularly suitable as load-bearing cladding, may absorb higher loads as well
- With our profile connections, very strong connections that are resistant to tension, torsion and bending are produced using profile bores and Allen screws in connection with PS profiles
- Profile cutting upon request

Accessories: see page 26



Dimensional drawings

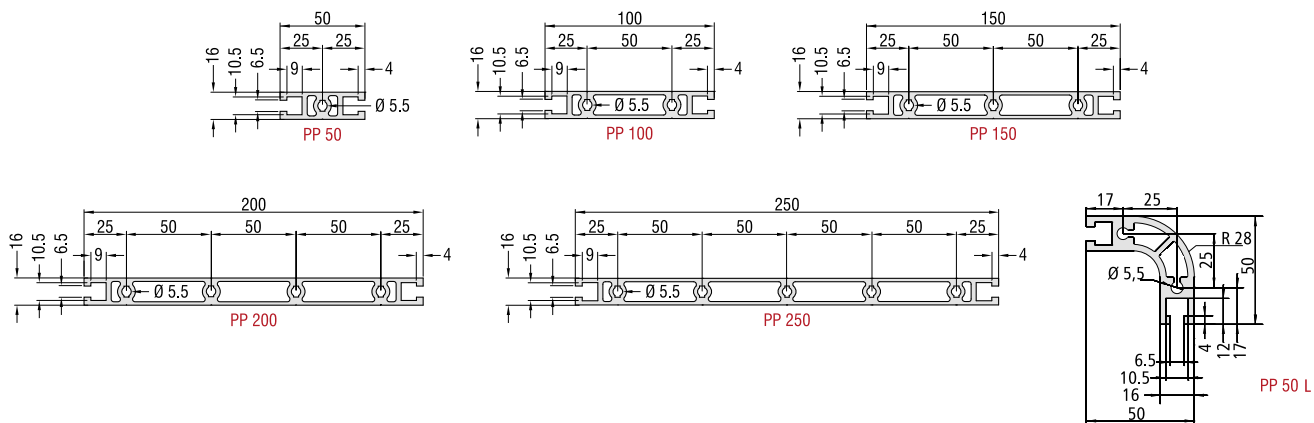

Technical data	PP 50 L	PP 50	PP 100	PP 150	PP 200	PP 250
Dimensions (W x H)	50 x 50 mm	50 x 16 mm	100 x 16 mm	150 x 16 mm	200 x 16 mm	250 x 16 mm
Length	up to 3 meters (special lengths upon request)					
Weight	≈ 1.7 kg/m	≈ 1.1 kg/m	≈ 1.9 kg/m	≈ 2.6 kg/m	≈ 3.4 kg/m	≈ 4.1 kg/m
Features	2 T-slot indents 2 hollow feeds Ø 5.5 mm for M6 screw	2 T-slot indents 1 hollow feed Ø 5.5 mm for M6 screw	2 T-slot indents 2 hollow feeds Ø 5.5 mm for M6 screw in a 50 grid	2 T-slot indents 3 hollow feeds Ø 5.5 mm for M6 screw in a 50 grid	2 T-slot indents 4 hollow feeds Ø 5.5 mm for M6 screw in a 50 grid	2 T-slot indents 5 hollow feeds Ø 5.5 mm for M6 screw in a 50 grid
Moment of inertia I_x	13.25 cm ⁴	8.13 cm ⁴	67.27 cm ⁴	213.92 cm ⁴	482.77 cm ⁴	908.52 cm ⁴
Moment of inertia I_y	13.25 cm ⁴	1.37 cm ⁴	2.46 cm ⁴	3.55 cm ⁴	4.64 cm ⁴	5.74 cm ⁴
Resistance moment W_x	4.39 cm ³	3.25 cm ³	13.45 cm ³	28.52 cm ³	48.27 cm ³	72.68 cm ³
Resistance moment W_y	4.39 cm ³	1.71 cm ³	3.08 cm ³	4.44 cm ³	5.80 cm ³	7.17 cm ³

Order data

Part No. for L=1000mm	201045 1000	201040 1000	201041 1000	201042 1000	201043 1000	201009 1000
Part No. for L=3000mm (Raw profile length L=3050...3,100 mm)	201045 3000	201040 3000	201041 3000	201042 3000	201043 3000	201009 3000



T-slot plates, mounting, frame, rectangular, upright and connecting profiles.

Strong profiles for many applications

Our aluminum profiles are specially designed for use in industry and mechanical engineering. They impress with their versatility, compact design and outstanding stability. These properties make the installation of systems considerably easier and faster.

The right aluminum profile for every application

If you are looking for high-quality aluminum profiles for your specific applications, our profiles provide the ideal basis for efficient and stable constructions. In combination with our extensive range of accessories, numerous applications are possible.





Working tables AT 1 / AT 2 / AT 3

Working tables AT for clamping devices, clamping devices, for measuring, checking, testing, etc.

- Base made of PS series aluminum profiles equipped with braces made of PP series aluminum panel profiles
- Table top made of aluminum rectangular profile series RE 40 x 250 mm equipped with T-slots


Accessories:

- Shelf
- Mounting plates for robots
- Lifting rollers

Additional accessories: see page 26



Dimensional drawings

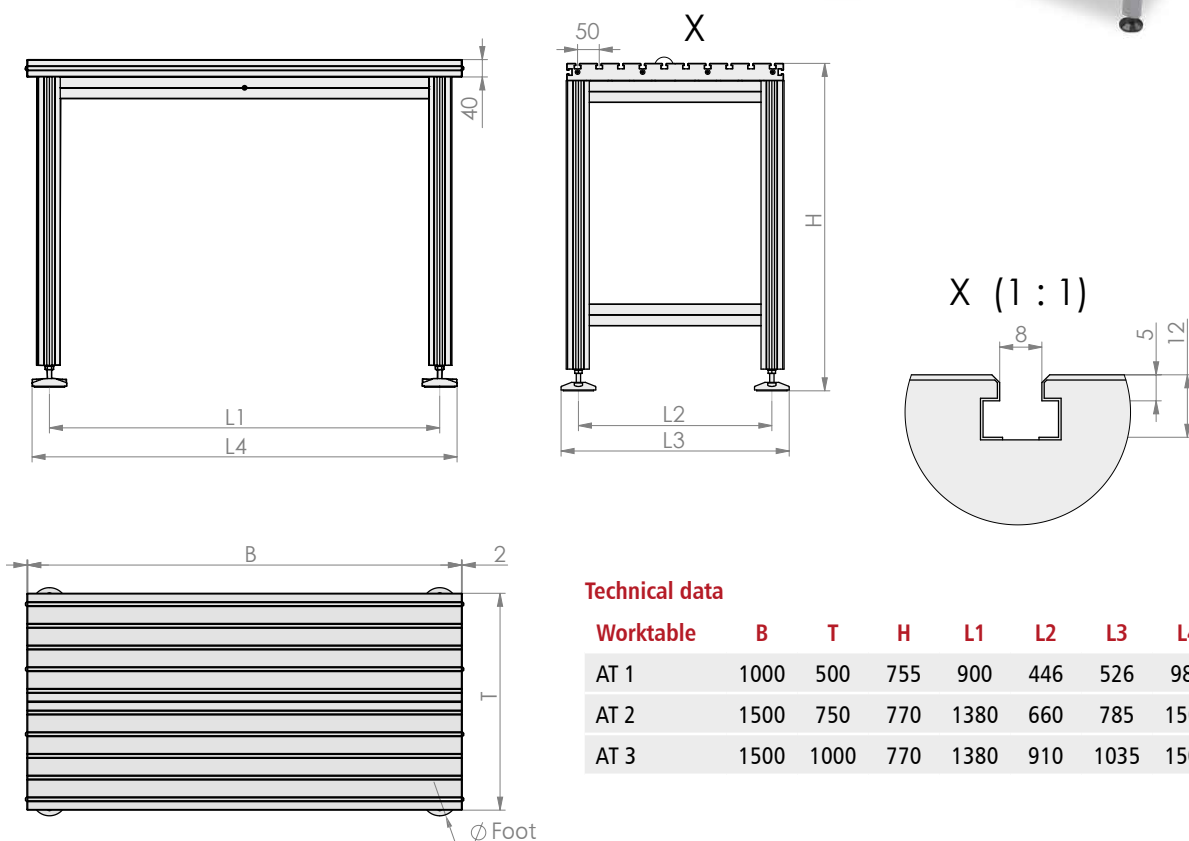

Technical data

Worktable	B	T	H	L1	L2	L3	L4	Ø Foot
AT 1	1000	500	755	900	446	526	980	80
AT 2	1500	750	770	1380	660	785	1505	125
AT 3	1500	1000	770	1380	910	1035	1505	125

Order data

Worktable	Dimensions WxDxH [mm]	Load capacity: distributed load [kg]	Weight [kg]	Part No.	Shelves (optional) Part No.
AT 1	1000 x 500 x 755	200	≈ 30	248550 0010	248551 0010
AT 2	1500 x 750 x 770	400	≈ 60	248550 0012	248551 0012
AT 3	1500 x 1000 x 770	400	≈ 75	248550 0013	248551 0013



Are you looking for a stable solution for the installation of 6-axis robots for industrial handling tasks?

Our work and assembly tables provide the necessary stability for robot installations that are used in automated production processes. Fixed or mobile with lifting and lowering rollers, you can easily integrate robot automation into your production for measuring, testing and assembly work.



Application example: AT 3 worktable with robot

The application example illustrates the versatile use of a robot on our AT 3 worktable.

Fits into your production too!

Designed for your specific needs, we offer work and assembly tables in individual widths, depths and heights.

You are free to decide, for example, where the robot should be positioned and whether a controller should be placed on the table or inside it.

Our work and assembly tables can be individually extended:

- Protective cover / enclosure
- Switch cabinet and control panel
- Lifting rollers or feet
- Closed body with hinged doors
- Sturdy shelf

► Adapter plates for various robot types can be obtained directly from us.





Assembly table MT2


Assembly tables for clamping fixtures, clamping devices, for measuring, checking, testing, etc.

- Base frame made of PS series aluminum profiles with struts made of PP series aluminum panel profiles
- Table top and rear panel made of RE series aluminum rectangular profiles with T-slot inserts

Accessories:


- Shelf
- Mounting plates for robots
- Lifting rollers

Additional accessories:
see page 26

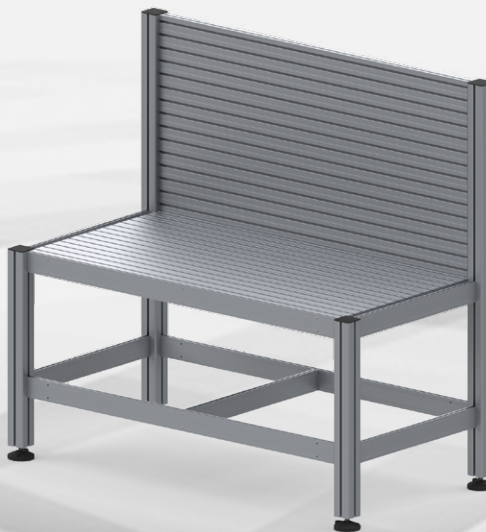


Dimensional drawings

MT 2 - PS80

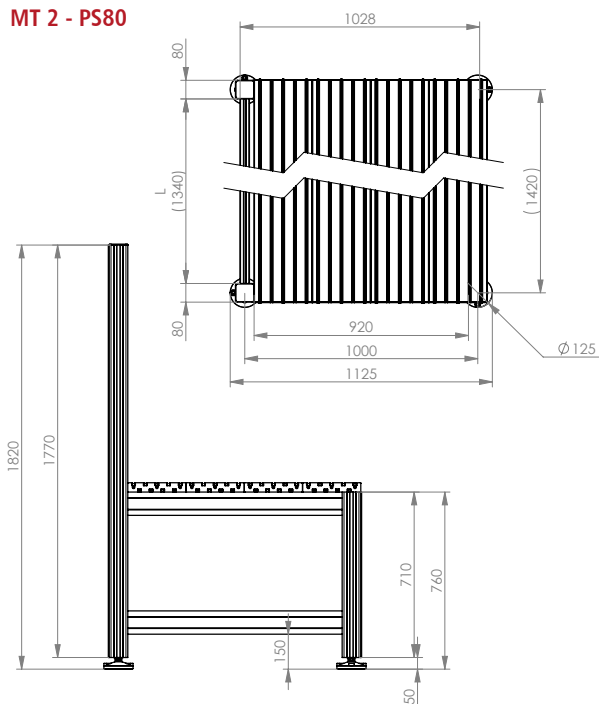

MT 2 - PS50

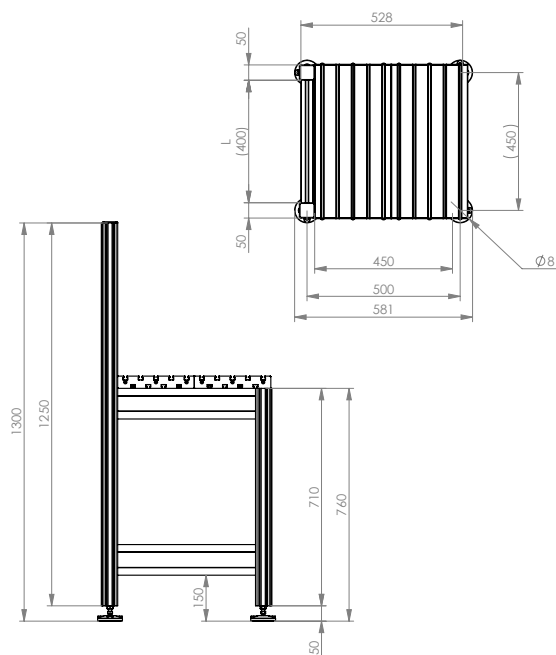

Order data

MT 2 assembly table with T-slot plate	Table surface [mm]	Part No.	Shelf (optional) Part No.
MT 2 - PS80 - 1500	1500 x 1000	248550 1001	248550 10011
MT 2 - PS80 - 2000	2000 x 1000	248550 1002	248550 10021
MT 2 - PS80 - 2500	2500 x 1000	248550 1003	248550 10031
MT 2 - PS80 - 3000	3000 x 1000	248550 1004	248550 10041
MT 2 - PS50 - 500	500 x 500	248550 1005	248550 10051
MT 2 - PS50 - 1000	1000 x 500	248550 1006	248550 10061
MT 2 - PS50 - 1500	1500 x 500	248550 1007	248550 10071
MT 2 - PS50 - 2000	2000 x 500	248550 1008	248550 10081



Assembly table MT2 | variants with T-slot plate



PS50 - 500



PS50 - 1000



PS50 - 1500



PS50 - 2000



MT 2 - PS80 - 1500



MT 2 - PS80 - 2000



MT 2 - PS80 - 2500



MT 2 - PS80 - 3000




Robot tables RT 1 / RT 2 / RT 3

- fully assembled
- closed body with hinged doors
- including lifting castors
- base frame made of aluminum profiles
PS series with struts made of aluminum
PP series panel profiles
- table top made of aluminum rectangular profiles
RE series with T-slot inserts

Accessories:

- integrated socket
- air filter
- doors from both sides
- air connections
- adapter plate / flanges for robot

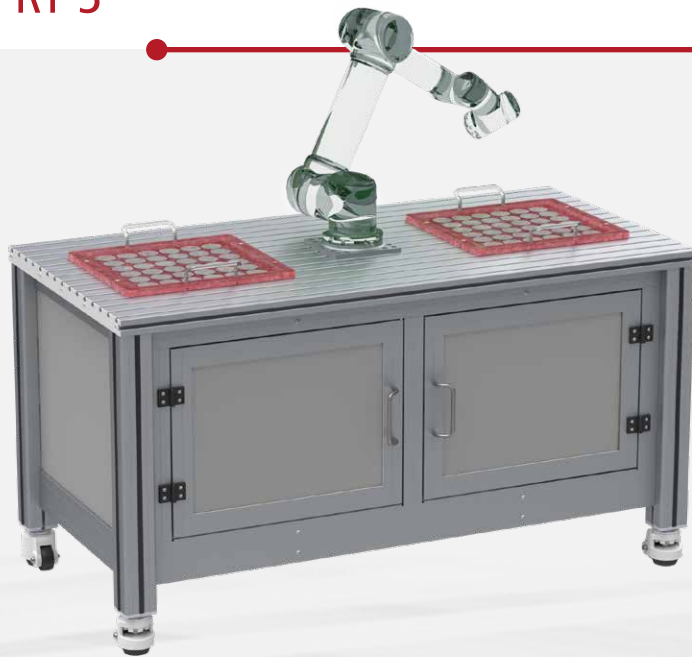

Robots and placement nests are not included in the scope of delivery.

Maximum stability and efficiency:

Our reliable solution for your robot installation in industrial handling

With our stable robot tables, cobots can be reliably integrated into your production processes - ideal for measuring, testing or assembly tasks, testing or assembly tasks. You can order adapter plates for various robot types directly from us.




Order data

Robot table	Dimensions WxDxH [mm]	Part No.
RT 1	750 x 750 x 800	248555 0010
RT 2	1000 x 750 x 800	248555 0012
RT 3	1500 x 750 x 800	248555 0013




Dimensional drawings


RT 1

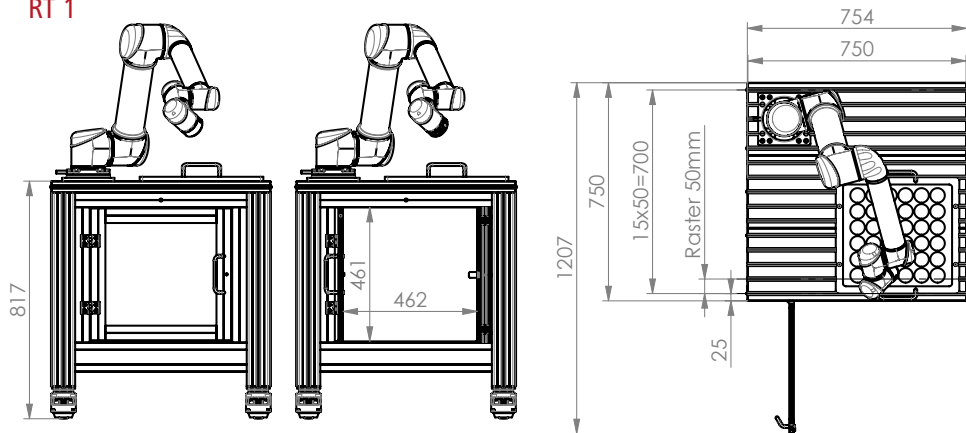

RT 2

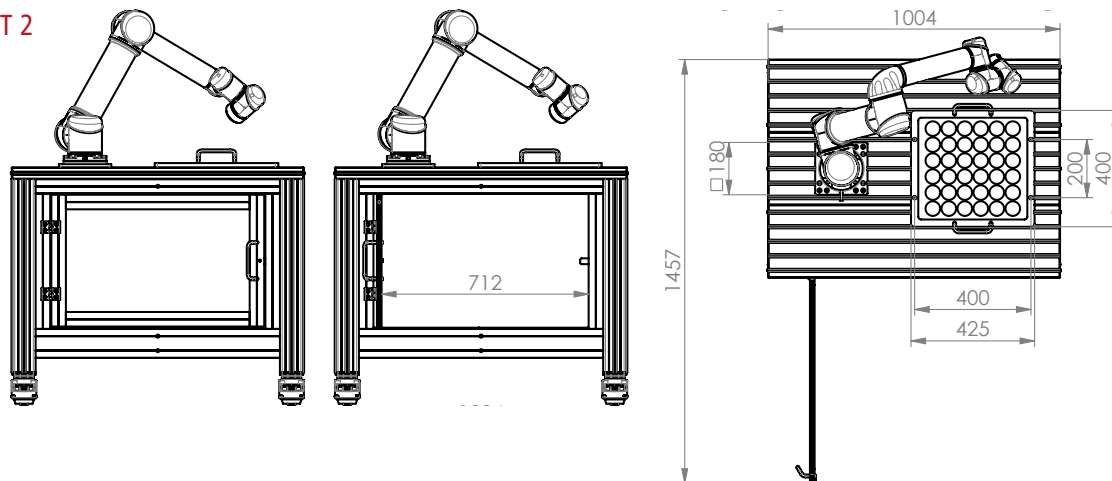


RT 3

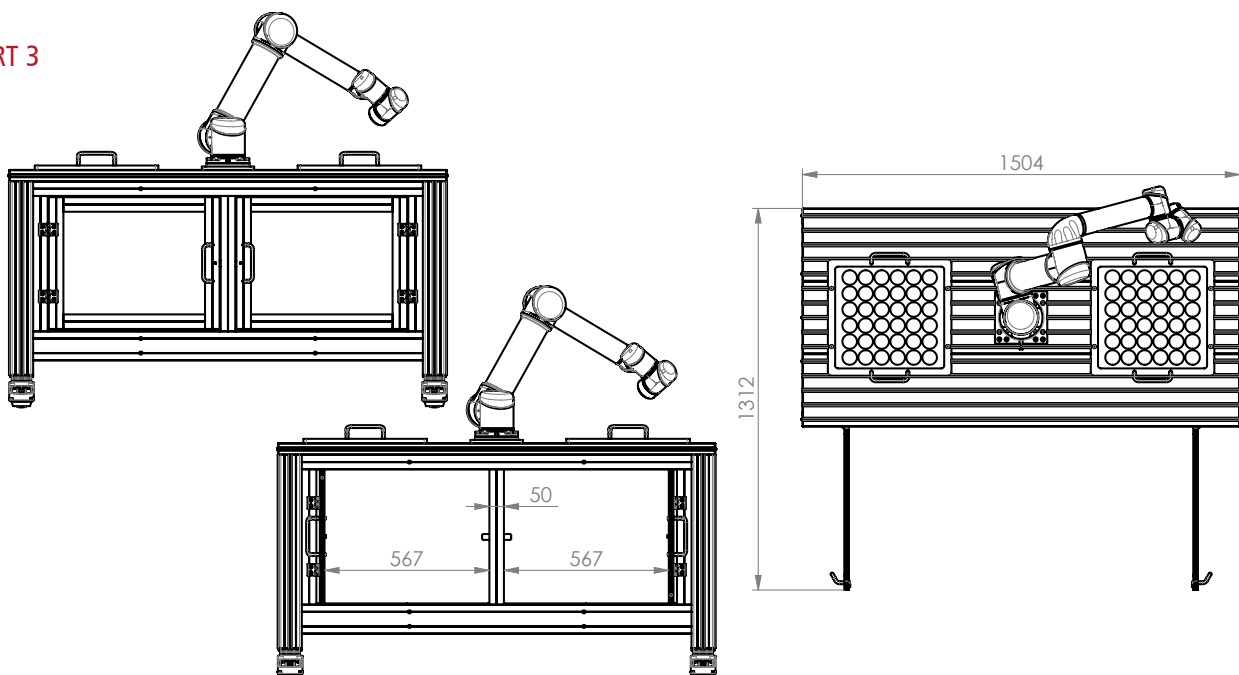



Configurable machine base frames

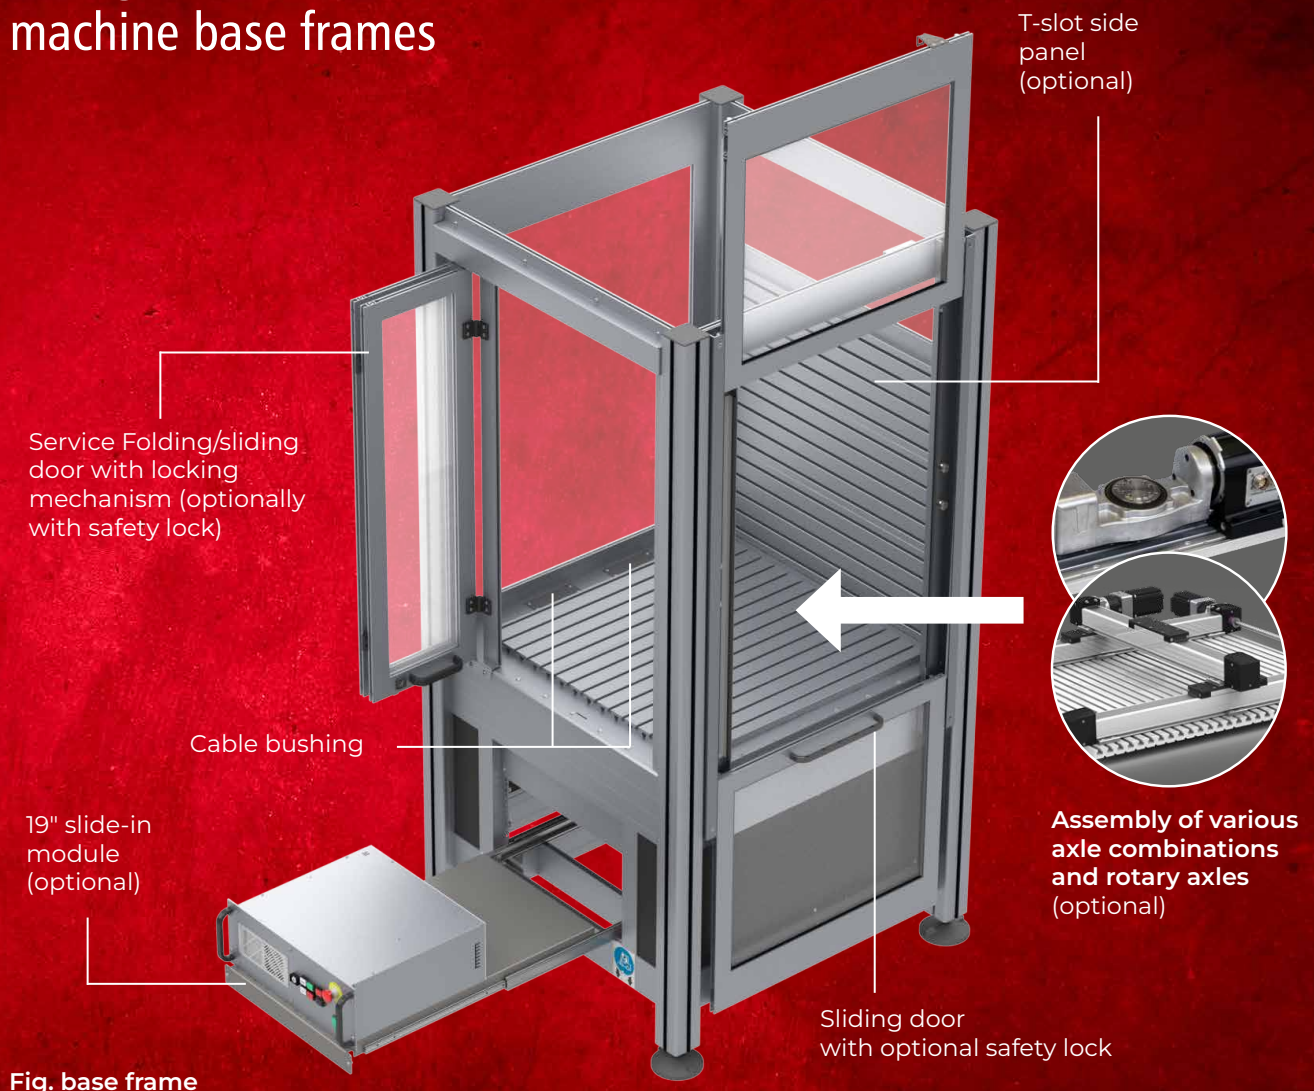

Safe enclosure of axle systems and handling systems

- individual base frame for your application
- freely configurable
- various door systems and service doors
- dimensions according to your specifications and requirements
- optional safety lock
- free design of the cladding (safety glass, sheet metal, decor, laser safety glass, etc.)
- T-slot table surface and back panel for free design
- optional 19" plug-in unit for control unit, control computer etc.
- can be extended with operating terminal, control cabinet, safety light barriers mounting plates for robots and lifting rollers etc.

Your complete solution with high flexibility and short delivery times.

Design, production and assembly – **Everything from a single source!**



Dimensioned drawing | Base frame

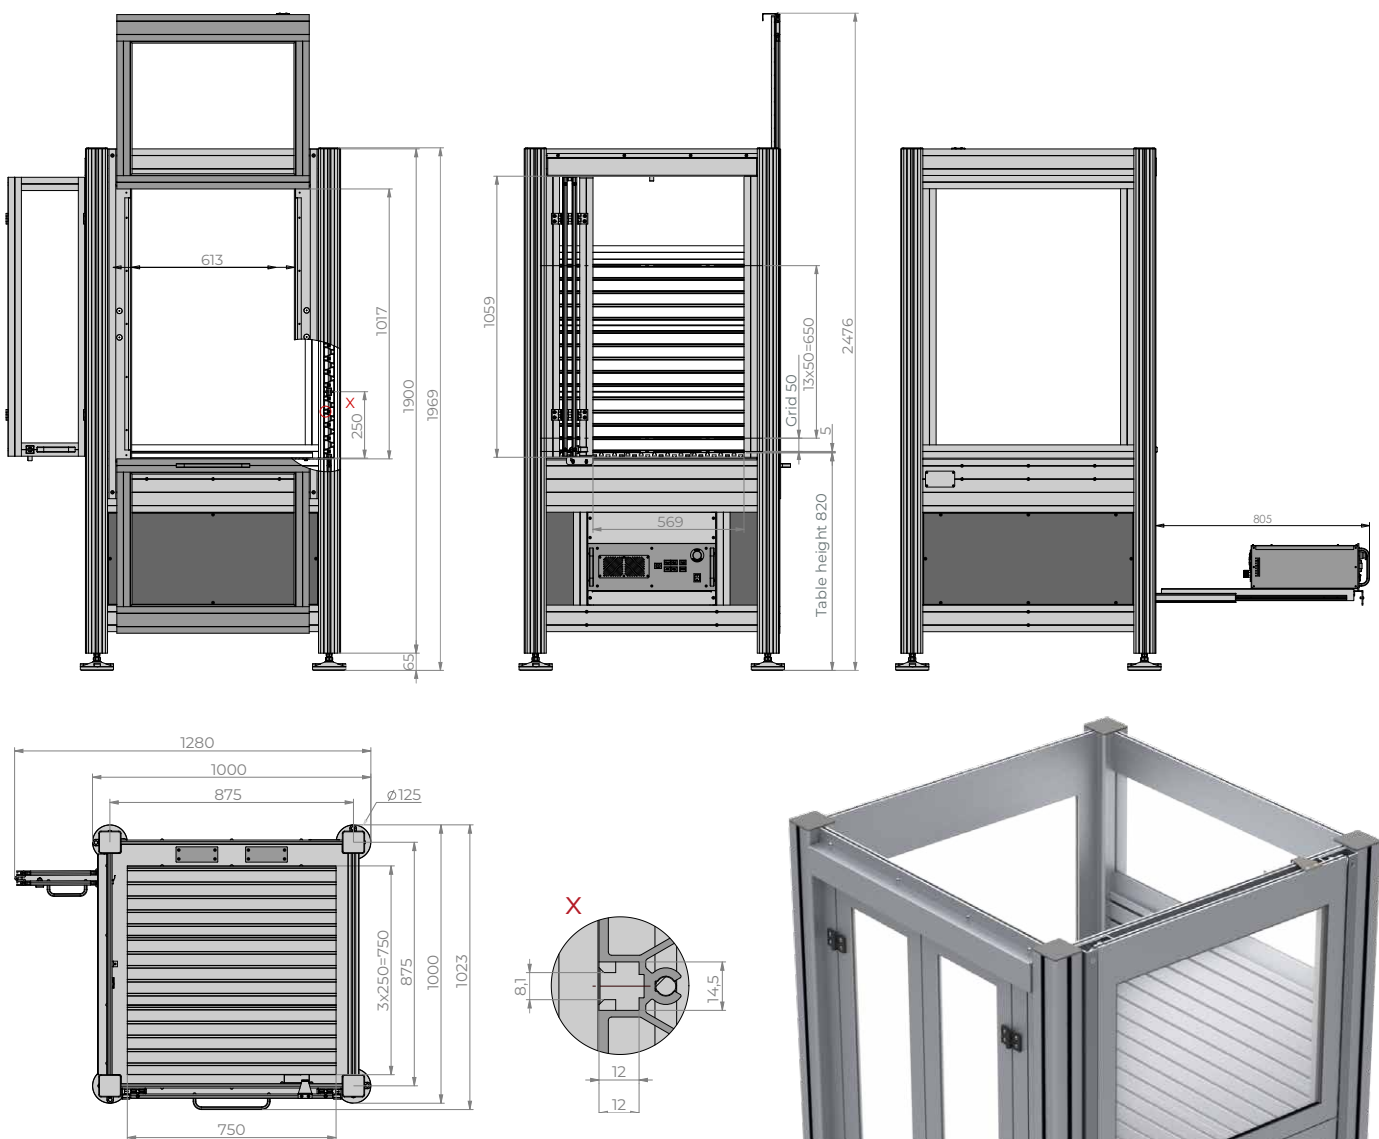


Fig. base frame

Customized production

We create your customized machine frame together with you!

For further information, please contact our competent sales team:

Katja Henkel

Tel.: +49 6659 981-744

Mail: Katja.Henkel@isel.com


Steffan Gärtch

Tel.: +49 6659 981-773

Mail: Steffan.Gaerth@isel.com



Accessories | for panel profiles (PT and RE)

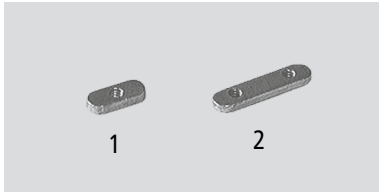

Sliding nut M6 (Figure 1)

- L 25 × W 13 × H 5
 - Galvanised
 - VE 50 units
 - For PT/RE 40, 65
- Part no.: 209004 0001

2 × M6 sliding nuts (Figure 2)

- L 45 × B 13 × H 6
 - verzinkt
 - 2 × M6 Ra 25mm
 - VE 25 Stück
 - für PT / RE 40, 65
- Part no.: 209005 0001



M5/M6 sliding nuts

- Galvanised
- VE 20 units
- for PT25, PT 50, PS 200, RE 40 and RE 65 (securing only possible at the top)

with spring

Part no.: 209005 0002 (M5/ Figure 1)


Part no.: 209005 0003 (M6/ Figure 2)

with large chamfer

Part no.: 209005 0004 (M6/ Figure 3)


in rhombus shape

Part no.: 209005 0006 (M6/ Figure 4)

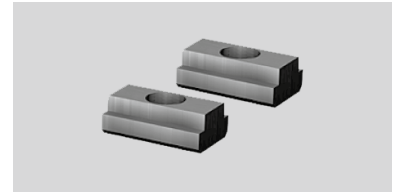


M6 T-keyways

- DIN 508
 - Hardened
 - VE 20 units
 - for PT/ RE 40, 65
- Part no.: 209119 0003

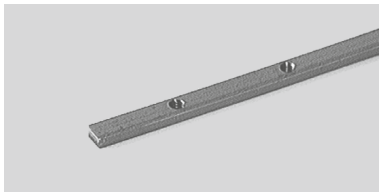


M6 tapped rail

- 13 × 6 mm
 - Galvanised
 - M6 Ra 50 mm
 - VE 3 units at 1 m
 - for PT/RE 40, 65
- Part no.: 209010

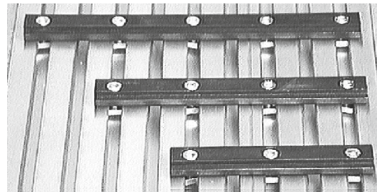


Stop rail

- galvanised
 - W 20 × H 10
 - Ra 50
 - VE 2 units and fixing material
- L 125 mm | Part no.: 290021 0125
L 175 mm | Part no.: 290021 0175
L 225 mm | Part no.: 290021 0225

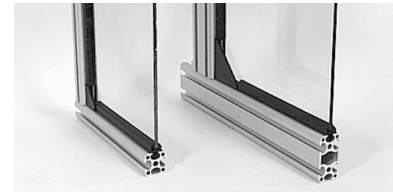


Black edging strip

- black, 1-part
 - For plate thicknesses 3 - 4 mm
 - VE 10 m
 - for RE-profiles
- Part no.: 209202 0001

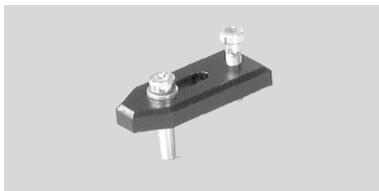

Spanneisen SE

- mit Stellschraube M6
 - VE 2 Stück
 - für RE / PT
- Part no.: 290051

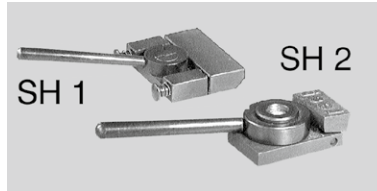


Hand lever clamping device

- for RE/PT
- SH 1 | Part no.: 290001
SH 2 | Part no.: 290002



Accessories | for pillar and panel profiles (PP, PU, PL and PS)

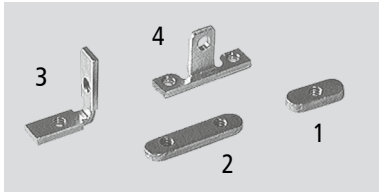

M6 sliding nut (Figure 1)

- L25 × W10 × H3.5
- Galvanised
- VE 100 units
- all except PT/RE 40, 65

Part no.: 209001 0005

2 × M6 sliding nuts (Figure 2)

- L45 × W10 × H3.5
- Galvanised
- VE 50 units
- for all except PT/RE 40, 65

Part no.: 209002 0004

M5 sliding nut

- L25 × W10 × H3.5
- Galvanised
- VE 20 units
- for all except PT/RE 40, 65

Part no.: 209006 0001

Angle sliding nut 2 × M6 (Figure 3)

- Galvanised
- VE 25 units
- for all except PT/RE 40, 65


Part no.: 209021 0003

Special angle sliding nut

3 × M6 (Figure 4)

- Galvanised
- VE 25 units
- for all except PT/RE 40, 65


Part no.: 209022 0003

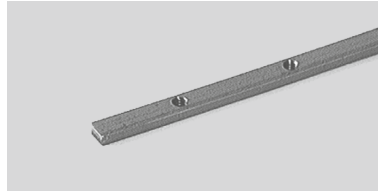

M6 tapped rail

- 10 × 4 mm
- Galvanised
- M6 Ra 50 mm
- VE 3 units at 1 m
- for all except PT/RE 40, 65/SP

Part no.: 209011

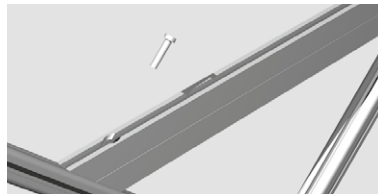

Plastic hinge strip

- L 65 × W 40
- VE 10 units and fixing
- Ra 43 × 20 mm
- for PL

Part no.: 209050 0012

Aluminium hinge strip


- L 40 × W 40 mm
- VE 10 units and fixing
- Ra 25 × 25 mm
- for all except PT/RE 40, 65

Part no.: 209050 0011

Cross-braces

- made from PP 50
- L 490 mm
- Mitred
- M6 drillings
- for all except PT/RE 40, 65

Part no.: 209300 0000

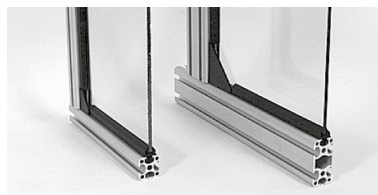

Black edging strip


- black, 1-part
- for plate thicknesses 3 - 4 mm
- VE 10 m

Part no.: 209202 0002 (PU-profiles)

Part no.: 209202 0001 (PP- and PS-profiles)



Accessories | for pillar and panel profiles (PP, PU, PL and PS)

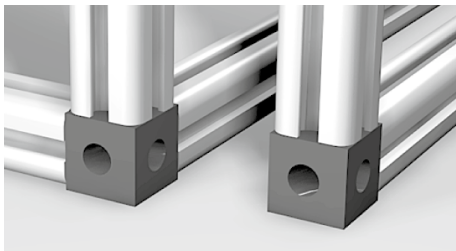


Profile connection cubes

- black
- VE 10 units and fixing material
- for PU 25

2-fold | Part no.: 209104 0002

3-fold | Part no.: 209103 0002

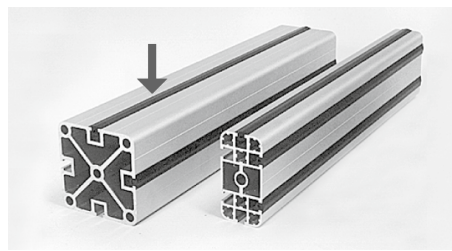


T-slot cover

- VE 30 m
- (turquoise = similar to RAL 5018)
- for all except PT/RE 40, 65

black | Part no.: 209201 0004

turquoise | Part no.: 209201 0003

light grey | Part no.: 209201 0007

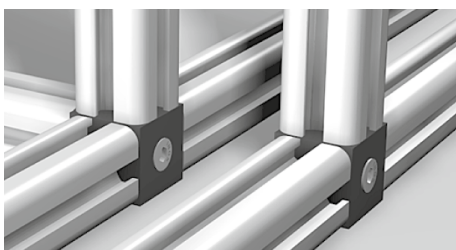


Profile connection cubes

- black
- VE 10 units and fixing material
- for PU 25

3-fold | Part no.: 209106 0002

4-fold | Part no.: 209107 0002

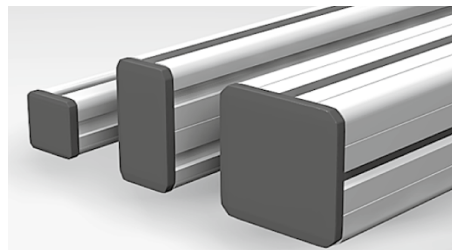

Profile covers

- black

PU 25 - 25 Units | Part no.: 209105 0003

PU 50 - 25 Units | Part no.: 209126 0003


PL 40 - 20 Units | Part no.: 209127 0003

PL 80 - 20 Units | Part no.: 209128 0003

PS 50 - 25 Units | Part no.: 209129 0003

PS 80 - 20 Units | Part no.: 209130 0003

PS 140 - 10 Units | Part no.: 209130 1001

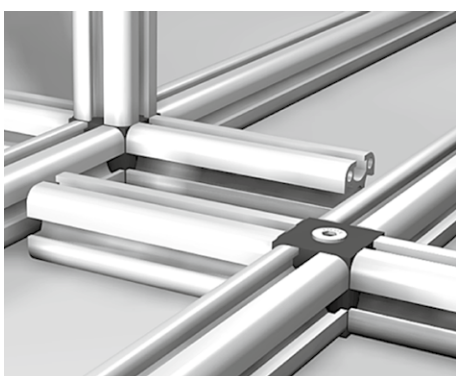

Profile connection cubes

- black
- VE 10 units and fixing material
- for PU 25

4-fold | Part no.: 209108 0002

5-fold | Part no.: 209109 0002



Lifting rollers

- PU 1 piece (mounting set)

for PS 50


- Wheel Ø 45 mm
- Load capacity 180 kg

Part no.: 675016 0072

for PS 80

- Wheel Ø 63 mm
- Load capacity 500 kg

Part no.: 675016 0073

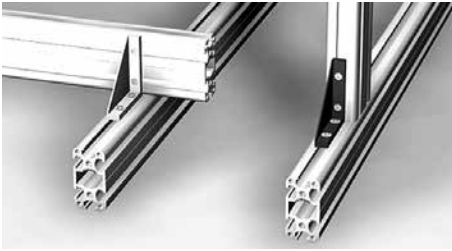

Aluminium corner connector

- L 25 × W 25 × H 15 mm
- VE 10 units and fixing material
- for PL, PS, PU, PP

natural | Part no.: 209114 0101

black | Part no.: 209114 0111

- L 40 × W 40 × H 22 mm
- VE 10 units and fixing material
- for PP/PL/PS/PU

natural | Part no.: 209115 0101

black | Part no.: 209115 0111

- L 50 × W 50 × H 15
- VE 10 units and fixing material
- for RE/PU/PS


natural | Part no.: 209116 0101

black | Part no.: 209116 0111

- L 80 × W 80 × H 22
- VE 10 units and fixing material
- for PP/PL/PS/PU

natural | Part no.: 209117 0101

black | Part no.: 209117 0111

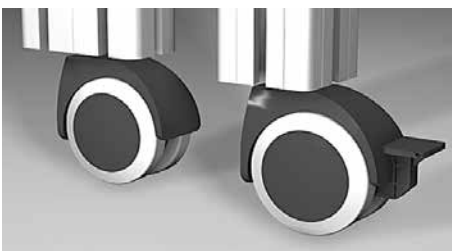

Rubber-tired guide rollers

- Ø 75 (M10)
- VE 4 units
- 2 with and 2 without locking device
- for PL 40/PS 50

Part no.: 209043 0011



Plastic equipment bases

- with rubber plate
- VE 4 units and setting screws
- black

for PL 40 / PS 50

- Ø 60
- M10 × 50 setting screws

Part no.: 209032 0003

for PL 80 / PS 80

- Ø 80
- M12 × 50 setting screws

Part no.: 209034 0001

for PL 80 / PS 80

- Ø 120
- Setting screws M12 × 50

Part no.: 209033 0003



Aluminium equipment bases

- with rubber plate
- VE 4 units, with setting screws and reducing bushings

for PU 50

- Ø 50
- M6 × 30 setting screws
- natural

Part no.: 209030 0000

for PS 100

- Ø 120
- M12 × 45 setting screws
- black

Part no.: 209033 0003

for PS 140


- Ø 170
- M16 × 100 setting screws
- black

Part no.: 209035 0001



Profile connections

Example **PS 50 with PU 50**

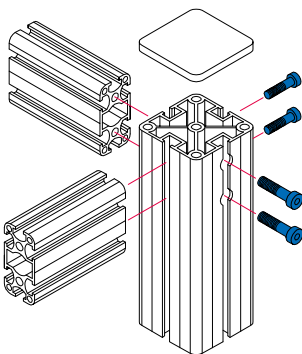

Allen screws
M6 × 25 mm

VE 10 units | Part no.: 209147 0010
VE 50 units | Part no.: 209147 0010

Allen screws
M6 x 50 mm


VE 10 St. | Part no.: 209147 0003
VE 50 St. | Part no.: 209147 0004

Allen key
SW 5

- DIN 911
- VE 1 unit

Part no.: 931152

Example **PS 50 with PP 250**




Tapped bushings
M9/M6

VE 10 units | Part no.: 209147 0001
VE 50 units | Part no.: 209147 0002


Tapped bushings
M10/M6

VE 10 units | Part no.: 209147 0124
VE 50 units | Part no.: 209147 0125

Example **PS 80 with PL 80**

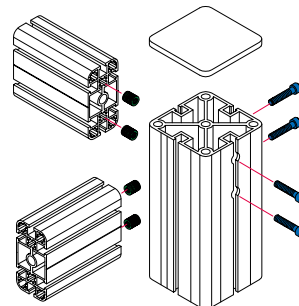


Example **PL 80**

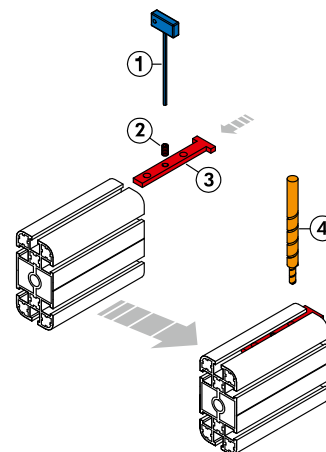

- 1 Hexagon-Socket Screwdriver
- 2 Grub Screw
- 3 Drilling Template
- 4 Twist Drill Ø 6 mm / Ø 10.4 mm

Example **Profile snaplock extension for PS 50**

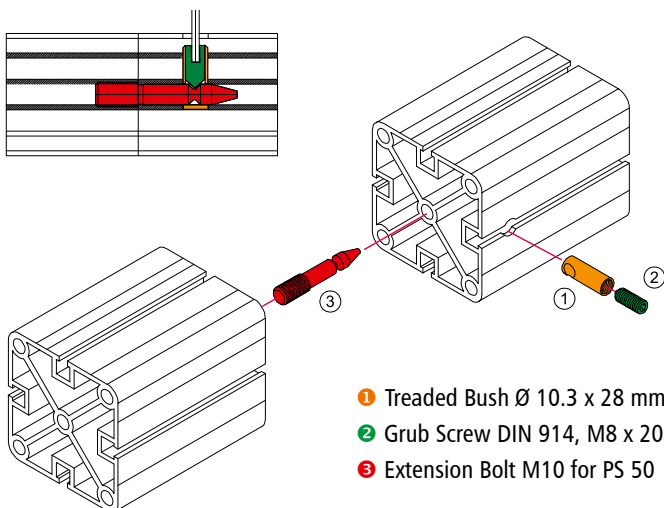

- 1 Threaded Bush Ø 10.3 x 28 mm
- 2 Grub Screw DIN 914, M8 x 20 mm
- 3 Extension Bolt M10 for PS 50

for **PS 50 / PL 40 (M10)**

- Locking bush, tapped pin, extension bolts

10 sets | Part no.: 209147 0120
50 sets | Part no.: 209147 0121

for **PS 80 / PL 80 (M12)**

- Locking bush, tapped pin, extension bolts

10 sets | Part no.: 209147 0122
50 sets | Part no.: 209147 0122

matching drill pattern 2

Part no.: 290015 0002

Stepped drill


- Ø 6/Ø 10.4 mm

Part no.: 400090



Profile snaplock connections


Example PL mit PS 80

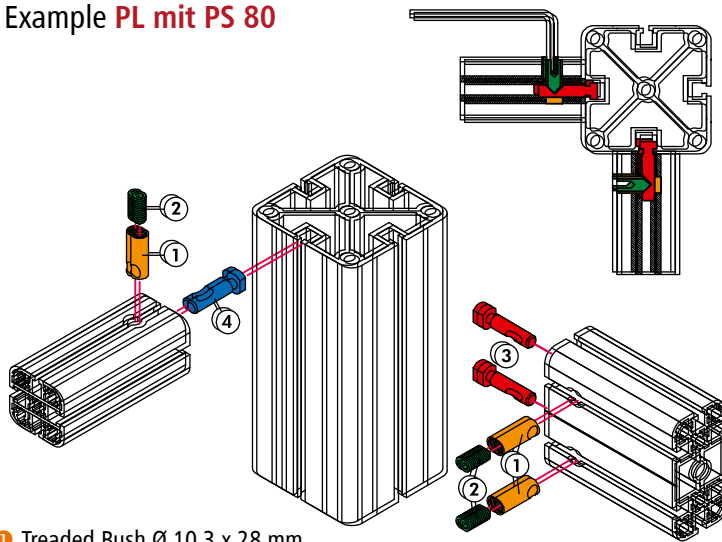

- ❶ Treaded Bush Ø 10.3 x 28 mm
- ❷ Grub Screw DIN 914, M6 x 20 mm
- ❸ Connection Bolt 0° for PL 40 and PL 80
- ❹ Connection Bolt 90° for PL 40 and PL 80


Snaplock connection 0 degrees

e.g. for PL / PS 80




Snaplock connection 90 degrees

e.g. for PP / PU / PS



Example PP mit PS 50

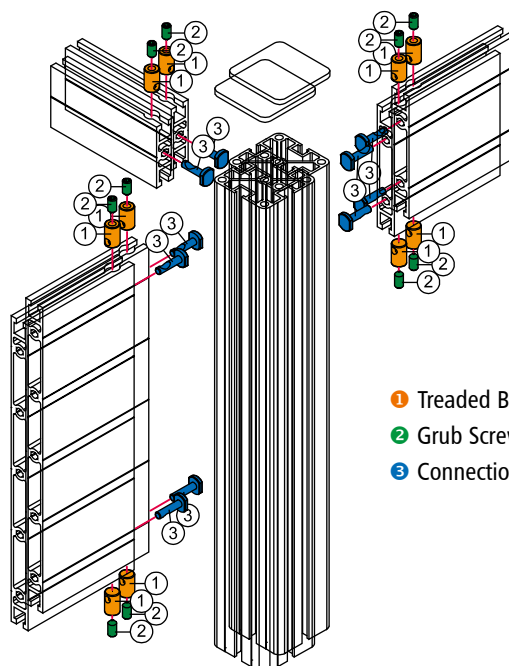

- ❶ Treaded Bush Ø 10.3 x 16,5 mm
- ❷ Grub Screw DIN 914, M6 x 12 mm
- ❸ Connection Bolt 90°

Snaplock connection

for PL

- Locking bush, tapped pin and bolts 0°
- 10 sets | Part no.: 209147 0102
- 50 sets | Part no.: 209147 0103

for PL

- Locking bush, tapped pin and bolts 90°
- 10 sets | Part no.: 209147 0112
- 50 sets | Part no.: 209147 0113

for PP / PU

- Locking bush, tapped pin and bolts 0°
- 10 sets | Part no.: 209147 0100
- 50 sets | Part no.: 209147 0101

for PP / PU

- Locking bush, tapped pin and bolts 90°
- 10 sets | Part no.: 209147 0110
- 50 sets | Part no.: 209147 0111

Stepped drill

Part no.: 400090

matching drill pattern 2

for PU 25 / PU 50 | Part no.: 290015 0001

for PL 40 / PL 80 | Part no.: 290015 0002

for PS 50 / PS 80 | Part no.: 290015 0003

Allen key

SW 3

- DIN 911
- Part no.: 931150



Modular flexibility and maximum stability

From universally applicable aluminum square-edged profiles to grooved plates that are face-milled on both sides to a selection of connection solutions

www.isel.com/automatisierung/basisgestelle/aluminiumprofile



Further publications

Media are available in our download area, software and regular updates are available.

www.isel.com/service/download



Optimally networked

Find out more about our branches and cooperation with selected partners.

www.isel.com/unternehmen/partner

isel Germany GmbH

Bürgermeister-Ebert-Straße 40

D-36124 Eichenzell

Tel: +49 (0) 66 59 / 981 - 700

E-Mail: info@isel.com

www.isel.com